

FOOD SERVICE TECHNOLOGY CENTER

PROMOTING ENERGY EFFICIENCY IN FOODSERVICE

1.800.398.3782 12949 Alcosta Blvd Suite 101 San Ramon CA 94583

Pre Rinse Spray Nozzle Test Summary Report **FSTC Report #: 501311194** **Date: 04/19/2013**

D. Kiefreider/ K. Sham

Specifications

Make	YUHUAN MEISHENG SANITARY WARE CO
Model	M0098SV-065G
Rated Flow Rate @ 60 psi (gpm)	0.65

Test Parameters

Water Pressure	60 ± 2 psi
Water Temperature	120 ± 4°F

Nozzle #1

Test	Flow Rate (gpm)	Cleanability (seconds)
1	0.64	17
2	0.64	17
3	0.64	16
Average	0.64	17

Nozzle #2

Test	Flow Rate (gpm)	Cleanability (seconds)
1	0.65	17
2	0.65	17
3	0.66	16
Average	0.65	17


Nozzle #3

Test	Flow Rate (gpm)	Cleanability (seconds)
1	0.64	16
2	0.64	17
3	0.64	17
Average	0.64	17


Average Results

	Water Flow (gpm)	Cleanability (seconds)
Nozzle #1	0.64	17
Nozzle #2	0.65	17
Nozzle #3	0.64	17
Average	0.64	17

Nozzle Average Flow Rate

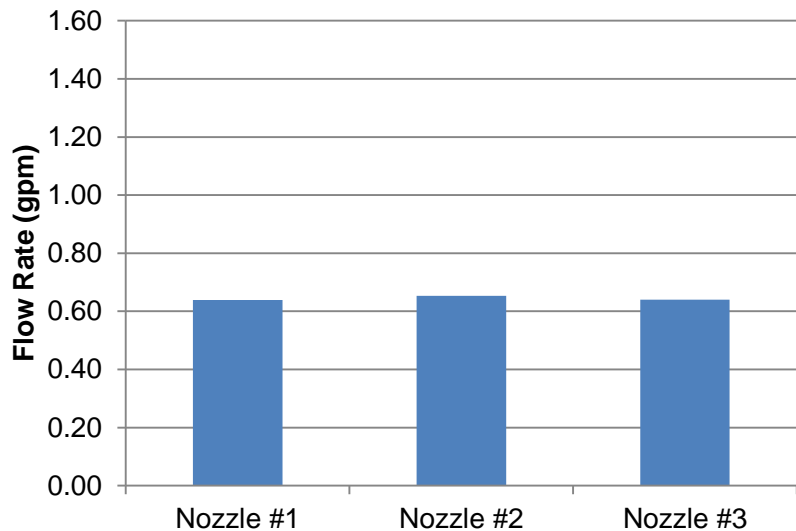

Nozzle Average Cleanability Time

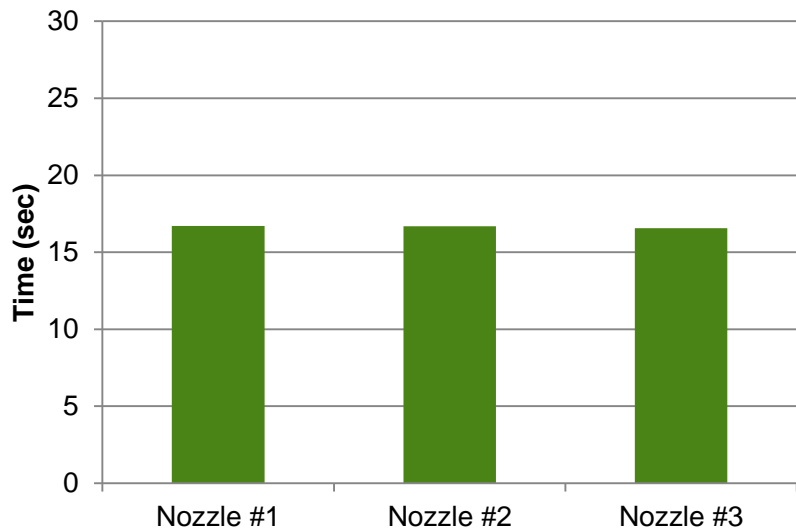

- Tested in accordance with ASTM F2324 - 03 (Standard Test Method for Prerinse Spray Valves)
- Tested nozzles are in compliance with the minimum performance provisions shown in section 1605.3(h) of CA Title 20 Appliance Efficiency Regulation
- Tested nozzles are in compliance with the appropriate marking requirements shown in section 1607 of CA Title 20 Appliance Efficiency

- The Food Service Technology Center program is funded by the California utility customer and administered by the Pacific Gas & Electric Company under the auspices of the California Public Utilities Commission

**Food Service
Technology Center**

Addendum: Report Certification

EPA Organization ID: 1113443

This certifies that the undersigned has performed equipment testing according to the methodology outlined in the report described below, and verifies that the results recorded in that report were the actual results observed.

Report: Yuhuan Meisheng Sanitary Ware Co. M0098SV-065G PRSV


Report #: 501311194-R0 Date published: May, 2013

File name: 13_05_03_Report#501311194-R0.pdf


Date sent for authorization: 05/03/2013

Tested by:  Date signed: 05/06/2013
(signature)

Kong Sham Research Engineer
(print name) (title)

FNI Authorization:  Date signed: 5/6/2013
(signature)

David Zabrowski Director of Engineering
(print name) (title)

PG&E Authorization:  Date signed: 5/6/13
(signature)

Charlene Spoor Senior Program Engineer
(print name) (title)