

Low Flow Prerinse Spray Valve Test Summary

Manufacturer Bricor
 Model B074 PRV
 Rated spec 0.74 gpm @ 60 psi

Report No. FSTC 08.12.08
 Date 08.12.08
 Tested by PG&E's Food Service Technology Center

Test Parameters

- Water Pressure @ 60 ± 2 psi
- Water Temperature @ 120 ± 4°F

Nozzle # 1

Test	Water Flow (gpm)	Cleanability (seconds)
1	0.71	23.97
2	0.70	21.72
3	0.71	21.00
Average	0.71	22.23

Nozzle #2

Test	Water Flow (gpm)	Cleanability (seconds)
1	0.71	21.64
2	0.71	20.98
3	0.71	20.17
Average	0.71	20.93


Nozzle # 3

Test	Water Flow (gpm)	Cleanability (seconds)
1	0.73	21.33
2	0.73	20.68
3	0.73	20.95
Average	0.73	20.99


Average Results:

	Average Water Flow (gpm)	Cleanability (seconds)
Nozzle #1	0.71	22.23
Nozzle #2	0.71	20.93
Nozzle #3	0.73	20.99
Overall Average	0.71	21.38

Low Flow Pre-Rinse Valve
Nozzle Number versus Water Flow

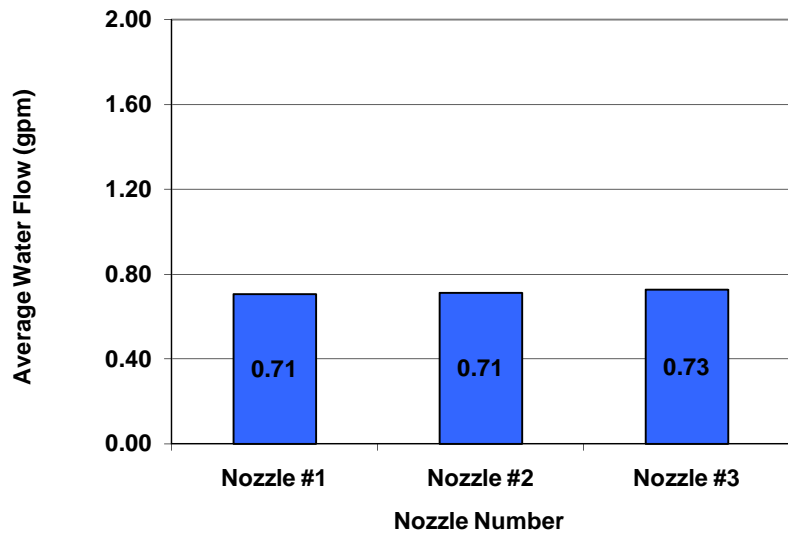

Low Flow Pre-Rinse Valve
Nozzle Number versus Cleanability Time

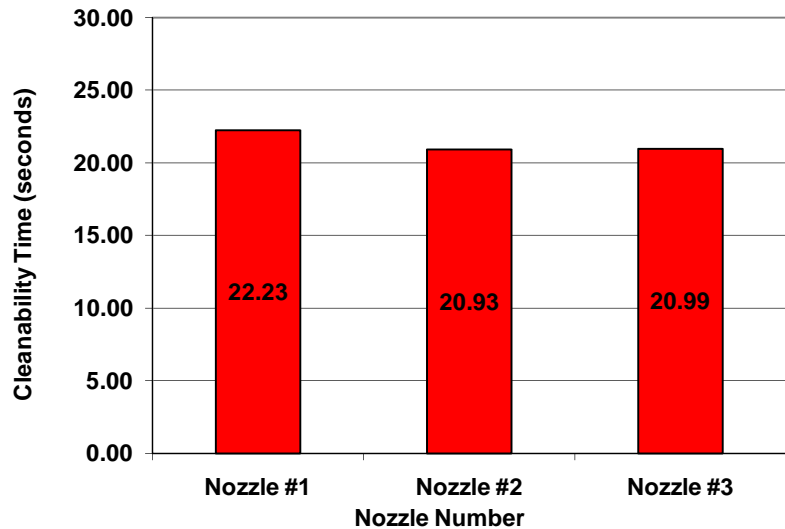

Food Service Technology Center
 12949 Alcosta Blvd., Suite #101
 San Ramon, Ca 94583
 800.398.3782

- Testing in Accordance with ASTM F2324 - 03 (Standard Test Method for Prerinse Spray Valves)
 - Tested nozzles are in compliance with the minimum performance provisions shown in section 1605.3(h) of CA Title 20 Appliance Efficiency Regulation
 - Tested nozzles are in compliance with the appropriate marking requirements shown in section 1607 of CA Title 20 Appliance Efficiency Regulation