

Low Flow Prerinse Spray Valve Test Summary

Manufacturer	<u>Strahman</u>
Model	<u>Kwik-Clean II</u>
Rated spec	<u>1.3 gpm @ 60 psi</u>

Report No.	<u>FSTC 06.01.06</u>
Date	<u>06.01.06</u>
Tested by	<u>PG&E's Food Service Technology Center</u>

Test Parameters

- Water Pressure @ 60 ± 2 psi
- Water Temperature @ 120 ± 4°F

Nozzle # 1

Test	Water Flow (gpm)	Cleanability (seconds)
1	1.20	24.72
2	1.19	24.12
3	1.20	23.53
Average	1.20	24.13

Nozzle #2

Test	Water Flow (gpm)	Cleanability (seconds)
1	1.13	26.58
2	1.13	27.12
3	1.13	26.62
Average	1.13	26.77


Nozzle # 3

Test	Water Flow (gpm)	Cleanability (seconds)
1	1.16	27.31
2	1.16	26.15
3	1.16	26.90
Average	1.16	26.79

Average Results:

	Average Water Flow (gpm)	Cleanability (seconds)
Nozzle #1	1.20	24.13
Nozzle #2	1.13	26.77
Nozzle #3	1.16	26.79
Overall Average	1.16	25.89

Low Flow Pre-Rinse Valve
Nozzle Number versus Water Flow

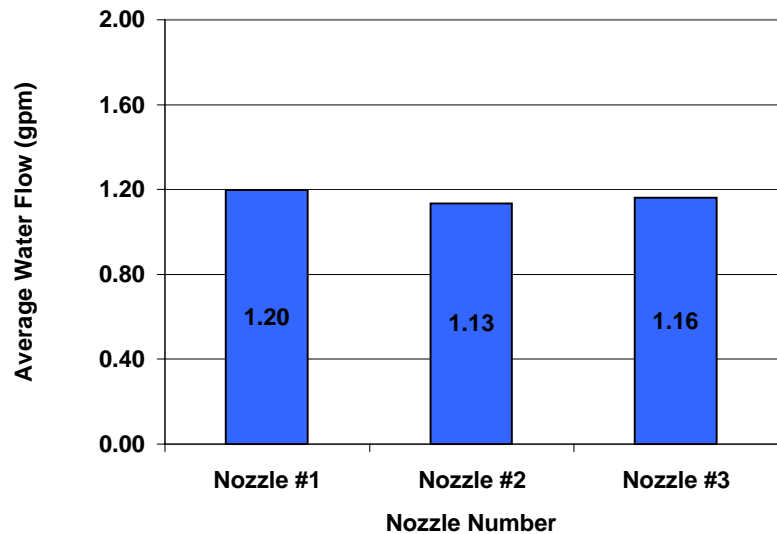

Low Flow Pre-Rinse Valve
Nozzle Number versus Cleanability Time

