

Low Flow Prerinse Spray Valve Test Summary

| | |
|--------------|-------------------|
| Manufacturer | T&S Brass |
| Model | equip 5SV |
| Rated spec | 1.42 gpm @ 60 psi |

| | |
|------------|---------------------------------------|
| Report No. | FSTC 07.18.06 |
| Date | 07.18.06 |
| Tested by | PG&E's Food Service Technology Center |

Test Parameters

- Water Pressure @ 60 ± 2 psi
- Water Temperature @ 120 ± 4°F

Nozzle # 1

| Test | Water Flow (gpm) | Cleanability (seconds) |
|---------|------------------|------------------------|
| 1 | 1.40 | 21.68 |
| 2 | 1.40 | 21.65 |
| 3 | 1.40 | 21.29 |
| Average | 1.40 | 21.54 |

Nozzle #2

| Test | Water Flow (gpm) | Cleanability (seconds) |
|---------|------------------|------------------------|
| 1 | 1.44 | 22.93 |
| 2 | 1.43 | 21.72 |
| 3 | 1.42 | 21.97 |
| Average | 1.43 | 22.20 |


Nozzle # 3

| Test | Water Flow (gpm) | Cleanability (seconds) |
|---------|------------------|------------------------|
| 1 | 1.39 | 19.62 |
| 2 | 1.40 | 21.44 |
| 3 | 1.40 | 21.55 |
| Average | 1.40 | 20.87 |


Average Results:

| | Average Water Flow (gpm) | Cleanability (seconds) |
|-----------------|--------------------------|------------------------|
| Nozzle #1 | 1.40 | 21.54 |
| Nozzle #2 | 1.43 | 22.20 |
| Nozzle #3 | 1.40 | 20.87 |
| Overall Average | 1.41 | 21.54 |

Low Flow Pre-Rinse Valve
Nozzle Number versus Water Flow

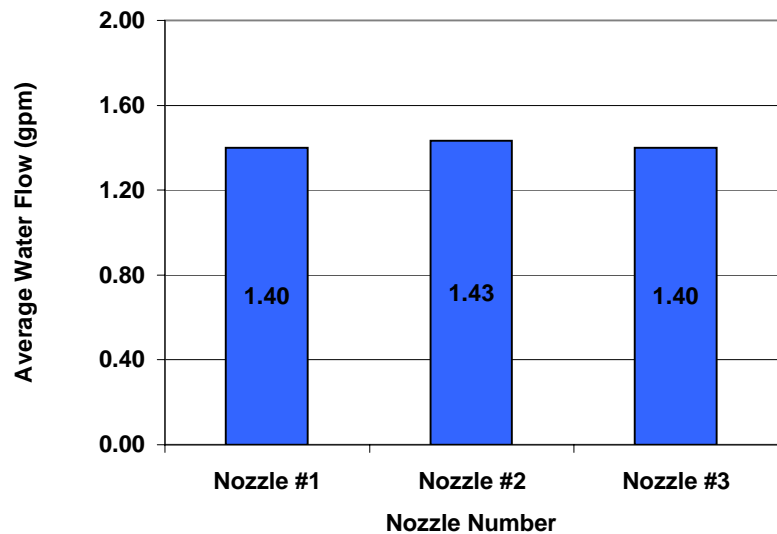

Low Flow Pre-Rinse Valve
Nozzle Number versus Cleanability Time

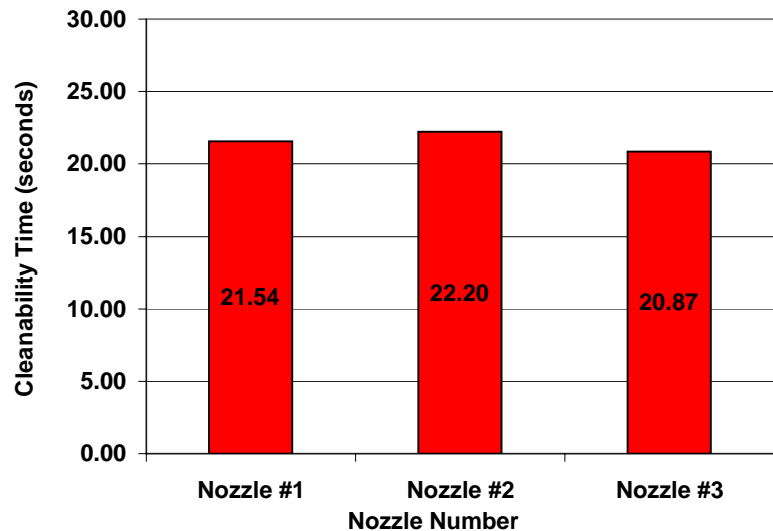

Food Service Technology Center
12949 Alcosta Blvd., Suite #101
San Ramon, Ca 94583
800.398.3782

Testing in Accordance with ASTM F2324 - 03
Standard Test Method for Prerinse Spray Valves