

Low Flow Prerinse Spray Valve Test Summary

Manufacturer	<u>Bricor</u>
Model	<u>B095NS</u>
Rated spec	<u>0.94 gpm @ 60 psi</u>

Report No.	<u>FSTC 05.31.07</u>
Date	<u>05.31.07</u>
Tested by	<u>PG&E's Food Service Technology Center</u>

Test Parameters

- Water Pressure @ 60 ± 2 psi
- Water Temperature @ 120 ± 4°F

Nozzle # 1

Test	Water Flow (gpm)	Cleanability (seconds)
1	0.93	22.97
2	0.93	23.05
3	0.93	22.75
Average	0.93	22.92

Nozzle # 2

Test	Water Flow (gpm)	Cleanability (seconds)
1	0.94	23.30
2	0.94	22.89
3	0.94	22.99
Average	0.94	23.06


Nozzle # 3

Test	Water Flow (gpm)	Cleanability (seconds)
1	0.96	22.95
2	0.96	22.64
3	0.96	22.63
Average	0.96	22.74


Average Results:

	Average Water Flow (gpm)	Cleanability (seconds)
Nozzle #1	0.93	22.92
Nozzle #2	0.94	23.06
Nozzle #3	0.96	22.74
Overall Average	0.94	22.91

Low Flow Pre-Rinse Valve
Nozzle Number versus Water Flow

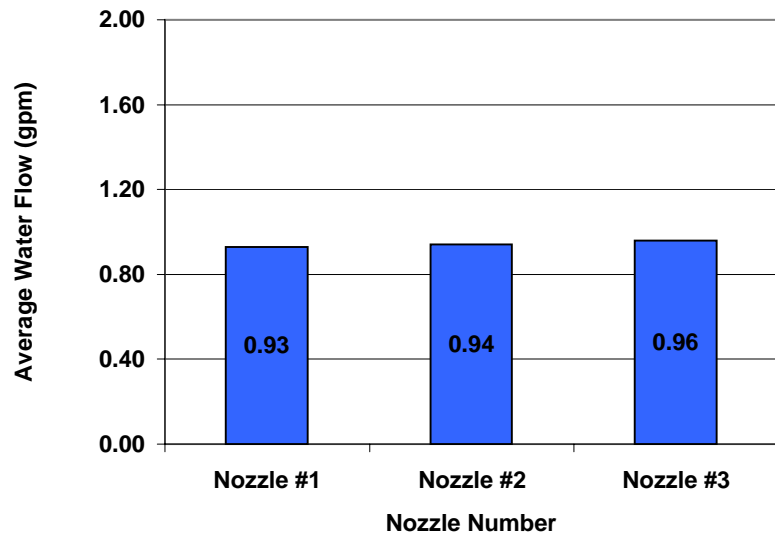

Low Flow Pre-Rinse Valve
Nozzle Number versus Cleanability Time

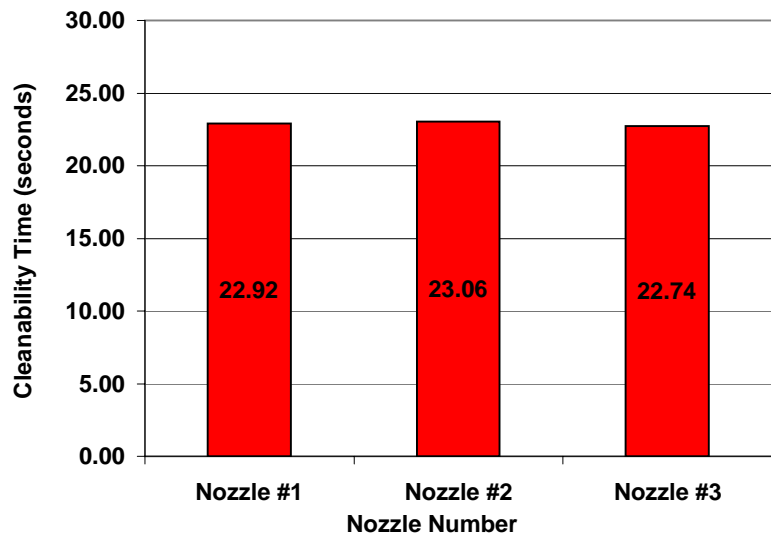

Food Service Technology Center
12949 Alcosta Blvd., Suite #101
San Ramon, Ca 94583
800.398.3782

- Testing in Accordance with ASTM F2324 - 03 (Standard Test Method for Prerinse Spray Valves)
- Tested nozzles are in compliance with the minimum performance provisions shown in section 1605.3(h) of CA Title 20 Appliance Efficiency Regulation
- Tested nozzles are in compliance with the appropriate marking requirements shown in section 1607 of CA Title 20 Appliance Efficiency Regulation